

UNMATCHED PERFORMANCE



LPD-SERIES LEVEL PADS


STABLE ANTI-VIBRATION PROTECTION FOR YOUR EQUIPMENT

LEVEL PADS are easy to adjust and have a wide base for enhanced stability.




LP-3

LP-6

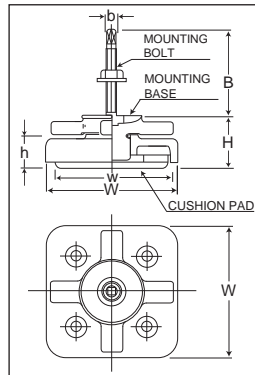

LP-12

LP-18

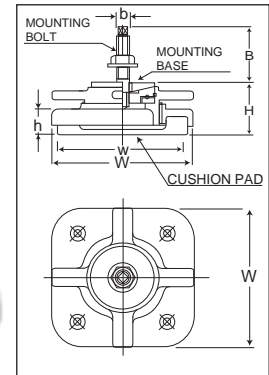


- The cushion pad is divided into 4 parts for greater effect.
- The divided pad is replaceable.

- A universal washer is used as a mounting base. Machinery can be leveled evenly on an inclined floor. (Allowable incline up to 3°)

Model	Max. kg/unit	W	H	w	h	Mounting Base	B	b	Rubber Thickness	Range of Level Adjustment
LP-3	300 kg 661 lbs	110mm 4.33"	48mm 1.88"	95mm 3.74"	28mm 1.10"	42mm 1.65"	80mm (172mm)* 3.14" (6.77")*	M12 P1.75	21mm 0.82"	15mm 0.59"
LP-6	600 kg 1322 lbs	130mm 5.11"	51mm 2.00"	115mm 4.52"	31mm 1.22"	60mm 2.36"	85mm (172mm)* 3.34" (6.77")*	M16 P2.0	24mm 0.94"	20mm 0.78"
LP-12	1,200 kg 2645 lbs	180mm 7.08"	70mm 2.75"	166mm 6.53"	33mm 1.29"	80mm 3.14"	85mm (172mm)* 3.34" (6.77")*	M18 P2.5	26mm 1.02"	24mm 0.94"
LP-18	1,800 kg 3968 lbs	220mm 8.66"	80mm 3.14"	206mm 8.11"	37mm 1.45"	95mm 3.74"	90mm (165mm)* 3.54" (6.49")*	M20 P2.5	28mm 1.10"	27mm 1.06"

Materials			Attachment Method			* () : Long Bolt	
Frame	Cushion Pad	Mounting Bolt					
F C 2.5	N B R	S S 4.1	Thread mounting bolt through anchor bolt hole				



HEAVY DUTY



LPD-30

LPD-40~80




Model	Max. kg/unit	W	H	w	h	Mounting Base	B	b	Rubber Thickness	Range of Level Adjustment
LPD-30	3000kg 6613 lbs	238mm 9.37"	72mm 2.83"	46.5X16mm 1.83"X0.62"	42mm 1.65"	82mm 3.22"	145mm 5.70"	M24 P3.0	29mm 1.14"	24mm 0.94"
LPD-40	4000 kg 8818 lbs	130mm 5.11"	90mm 3.54"	66.5X16mm 2.61"X0.62"	44mm 1.73"	90mm 3.54"	155mm 6.10"	M30 P3.5	32mm 1.25"	40mm 1.57"
LPD-60	6000 kg 13,227 lbs	435mm 17.1"	104mm 4.09"	90X12mm 3.54"X0.47"	45mm 1.77"	115mm 4.52"	190mm 7.48"	M36 P4.0	32mm 1.25"	50mm 1.96"
LPD-70	7000 kg 15,432 lbs	435mm 17.1"	104mm 4.09"	90X14mm 3.54"X0.55"	45mm 1.77"	115mm 4.52"	190mm 7.48"	M36 P4.0	32mm 1.25"	50mm 1.96"
LPD-80	8000 kg 17,636 lbs	435mm 17.1"	104mm 4.09"	90X16mm 3.54"X0.62"	45mm 1.77"	115mm 4.52"	190mm 7.48"	M36 P4.0	32mm 1.25"	50mm 1.96"

Materials			Attachment Method		
Frame	Cushion Pad	Mounting Bolt			
F C D 5.0	N B R	S 4.5 C	Thread mounting bolt through anchor bolt hole		

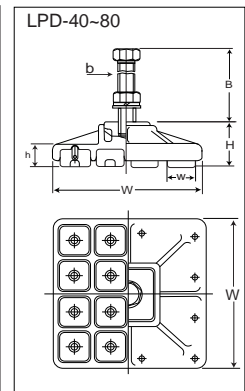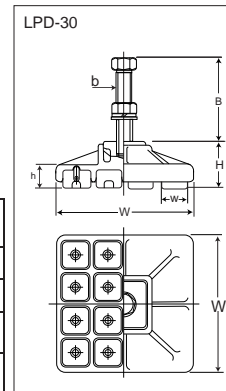

An industry leader in pressroom automation for more than 30 years, Oriimec provides robots, transfer systems, coil handling equipment and straightener/feeder combination units to customers worldwide. Manufactured in Japan, the Orii line of equipment is engineered to meet the specific needs of each of our customers. All Orii products sold in the U.S. are paired with expert service and technical support from our Erlanger, KY office.



Oriimec Corporation of America
1840 Airport Exchange Blvd. #200
Erlanger, KY 41018
U.S.A

Phone: 888.746.3320 (toll free)

Tel: 859.746.3318
Fax: 859.746.3319
Email: info@oriimec.com
Website: www.oriimec.com

THE SOLUTIONS LEADER IN THE METAL AND WIRE FORMING INDUSTRIES