

UNMATCHED PERFORMANCE



# CARRY SET CS-SERIES

## EASY-TO-MOVE ANTI-VIBRATION PAD WITH CASTERS

- Equipment that is often moved can be leveled quickly and securely.



CS-3G CS-3T







CS-1



CS-M





CS-R30

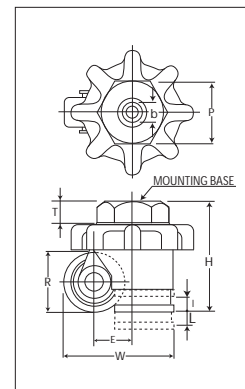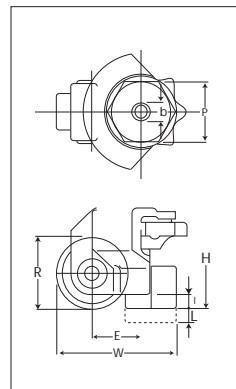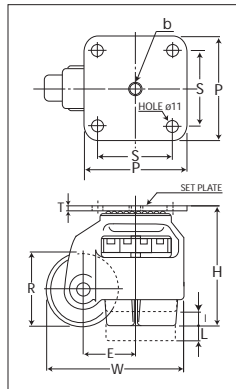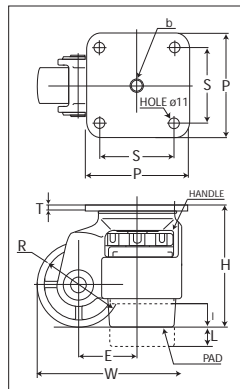

Model	Max. kg/unit	W	H	R	E	P	T	S	b	L	I
CS-R30	30 kg 66 lbs	69 mm 2.71"	70 mm 2.75"	40 mm 1.57"	23 mm 0.90"	41 mm 1.61"	12 mm 0.47"	--	M10 P1.5	10 mm 0.39"	9 mm 0.35"
CS-M	60 kg 132 lbs	85 mm 3.34"	80 mm 3.14"	50 mm 1.96"	35 mm 1.37"	41 mm 1.61"	9 mm 0.35"	--	M10 P1.5	12 mm 0.47"	10 mm 0.39"
CS-1	100 kg 220 lbs	135 mm 5.31"	120 mm 4.72"	74 mm 2.91"	52 mm 2.04"	100 mm 3.93"	6 mm 0.23"	72 mm 2.83"	M12 P1.75	17 mm 0.66"	16 mm 0.62"
CS-3 (G, T)	300 kg 661 lbs	156 mm 6.14"	130 mm 5.11"	90 mm 3.54"	63 mm 2.48"	100 mm 3.93"	6 mm 0.23"	80 mm 3.14"	M14 P2.0	20 mm 0.78"	25 mm 0.98"

Model	Materials				Attachment Method
	Frame	Pad	Wheels	Handle	
CS-R30	SPC	NBR	NYLON6	NYLON6	4 BOLT HOLES ON MOUNTING PLATE
CS-M	FC25	NBR	NYLON6	ABS	4 BOLT HOLES ON MOUNTING PLATE OR 1 SCREW HOLE IN CENTER OF MOUNT BASE
CS-1	FC25	NBR	NYLON6	NYLON6	
CS-3G	FCD55	NBR	NBR	NYLON6	
CS-3T	FCD55	NBR	FC25	NYLON6	

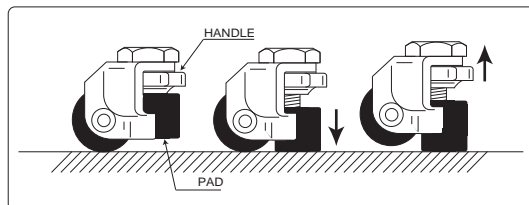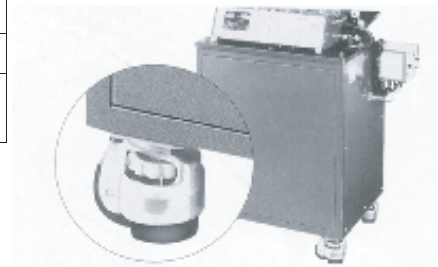

An industry leader in pressroom automation for more than 30 years, Oriimec provides robots, transfer systems, coil handling equipment and straightener/feeder combination units to customers worldwide. Manufactured in Japan, the Orii line of equipment is engineered to meet the specific needs of each of our customers. All Orii products sold in the U.S. are paired with expert service and technical support from our Erlanger, KY office.



Oriimec Corporation of America  
1840 Airport Exchange Blvd. #200  
Erlanger, KY 41018  
U.S.A

Phone:  
888.746.3320 (toll free)

Tel: 859.746.3318  
Fax: 859.746.3319  
Email: info@oriimec.com  
Website: www.oriimec.com

THE SOLUTIONS LEADER IN THE METAL AND WIRE FORMING INDUSTRIES